





Allante FFreeTM

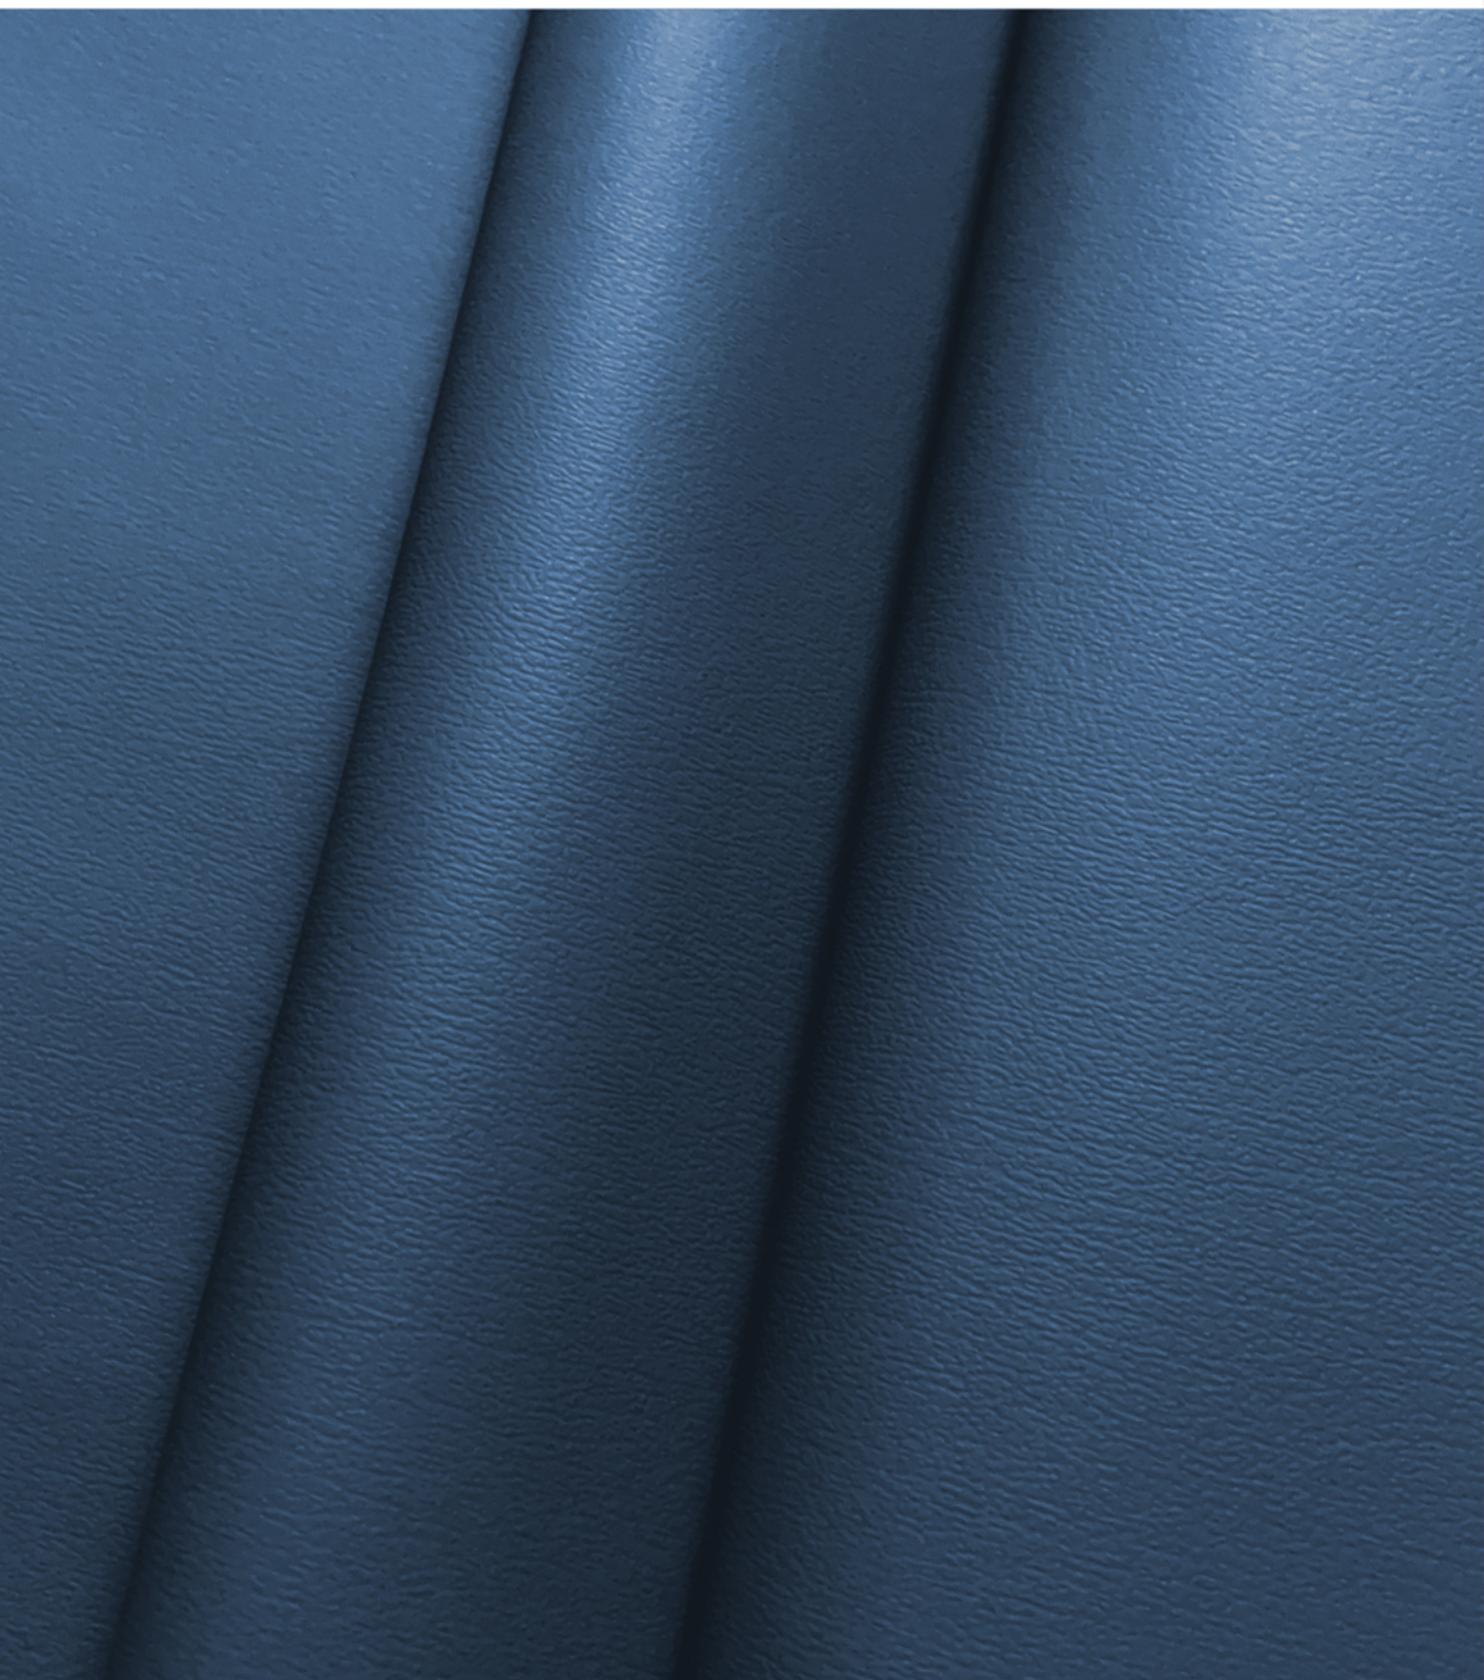



AF-902
Ice



AF-901
Bright White



AF-917
White Crush



AF-922
Ivory



AF-910
Illusion



AF-939
Birch



AF-907
Bleached Sand



AF-911
Taupe Fawn



AF-913
Warm Smoke



AF-938
Mist



AF-915
Cookie



AF-345
Flannel



AF-909
Autumn Rain



AF-346
Elephant



AF-903
Gibraltar



AF-343
Granite



AF-345
Malibu Blue



AF-905
Province Blue



AF-927
Riverside



AF-919
Eclipse

Allante FRee™



AF-937
Golden Kiwi



AF-341
Desert Sun



AF-340
Blooming Dahlia



AF-912
Sierra Brick



AF-342
Ginger Spice



AF-925
Italian Rose



AF-916
Red Truffle



AF-344
Thais Red



AF-924
Purple Impulse



AF-921
Chocolate Sundae



AF-904
Garden Green



AF-933
Mystic Lilly



AF-934
Winter Green



AF-914
Oasis Green



AF-935
Pagoda



AF-926
Niagara Mist




AF-931
Hawaiian Surf



AF-930
Regatta



AF-929
Nautical Blue



AF-936
Lagoon



AF-928
Horizon



AF-923
Mountain Sky



AF-908
Old Navy



AF-920
Galaxy



AF-906
Chateau Grey



AF-918
Ink Black



Allante FRee™

Specifications

Roll Width: 54 inches
 Roll Length: 40 yards
 Weight: 29.3 ± 2 oz per linear yard
 Thickness: 45 ± 5 mils
 Cold Crack: -25°
 5000 Hours WeatherOmeter
 Abrasion Resistance: No significant wear after 100,000 double rubs with #10 cotton duck using Wyzenbeek test method.

Feature & Benefits

- Flame Retardant Additive Free
- Anti-Microbial Retardant Additive Free
- Formulated Phthalate Free
- Denim Dye Resistant
- Oil Resistant
- Cleanable
- Made in North America
- Bromine-free, No Halogenated Flame Retardants (HFRs)
- REACH compliant
- RoHS compliant
- No heavy metals
- No Mercury
- No Bisphenol A (BPA)
- No Ozone Depleting Chemicals
- No PBT's (Persistent Bioaccumulative Toxic Chemicals)
- Contains bio-based renewable ingredients

Content

Vinyl

Backing

100% Polyester

Flame Resistance

Manufactured to meet the following flammability* requirements:

- EN 1021-1 and 2
- CA TB 117-2013 (Section E)
- UFAC Class 1
- NFP 260

*This term and corresponding data refer to the typical performance in the specific test indicated. They should not be construed to imply the behavior of this or any other material under actual fire conditions.

Recommended Applications

- Corporate
- Public Spaces
- Hotel/Motel/Entertainment
- Restaurant
- General Upholstry
- Residential/Home Office
- RV
- Casino
- Marine Interior

Care and Cleaning Instructions

This product has been developed to emulate the look and feel of soft leather. The unique super dull finish is designed to be low burnishing, non-polishing and resistant to ultraviolet exposure.

Allante vinyls have superb tailoring qualities, which make pre-heating and steaming unnecessary and are not recommended in the fabrication process.

Because of the special leather-like finish, additional precautions should be observed when processing and cleaning. Please avoid contact with marking inks, glues and other staining materials that may damage vinyl during manufacturing. Protecting seating with a clean polyethylene cover, as is common in the automotive industry, should enable you to deliver a stain-free unit to the customer.

If, despite all precautions, staining material does come in contact with Allante vinyls, cleaning should be immediate and should follow these instructions:

- Dry soil, Dust and Dirt, Dried on Dirt: Remove with soft cloth dampened with water.
- Variation in Surface Gloss: Wipe with a soft cloth dampened with water. Allow to air dry.
- Stubborn Dirt: Wash with a soft cloth moistened with a mild soap and water. Rinse with clean water.
- Stubborn Spots and Stains: Spray with either Formula 409®, or CRC 40173 Tannery Leather, Vinyl & More Cleaner & Conditioner, wiping with a soft cloth. Rinse with clean water.
- Liquid Spills: Wipe immediately with a clean absorbent cloth. Rinse with clean water.
- Food, Grease, and Oily Stains: Spray immediately using either Formula 409®, or CRC 40173 Tannery Leather, Vinyl & More Cleaner & Conditioner, wiping with a soft cloth.

Take care not to extend the area of contamination beyond its original boundary. Rinse with clean water.

Allante Vinyls should be periodically cleaned to maintain their appearance and prevent build-up of dirt and contaminants. Any stain, spill or soiling should be cleaned up promptly to prevent permanent staining. When cleaning, always rub gently.

Caution: Powdered abrasives, abrasive cleaners, and steel wool damage vinyl, as do strong solvents, lacquer solvents and inks. Lotions, suntan oil, waxes and polishes, etc., contain oils and dyes that can cause stiffening and staining of vinyls. Never use heat guns or hair dryers.

Note: Stronger cleaners, detergents, and solvents may be effective in stain removal but can cause either immediate damage or slow deterioration. Many such materials are wrongly recommended in marine and other related industries. The use of such cleaners is at the owner's own risk.

This information is offered for your general guidance only. It is accurate to the best of our knowledge at the time of printing, but it is not intended to relieve the user from their responsibility to investigate and understand other pertinent sources of information and to comply with the laws and procedures applicable to the safe handling and use of this material.



Morbern
Corporate Headquarters
 80 Boundary Road
 Cornwall, ON K6H-6M1
 Phone: 613.932.8811
 Fax: 613.932.9779
 888-MORBERN

Morbern
US Headquarters
 401 Fraley Road
 High Point, NC 27263
 United States
 Phone: 336.883.4332

Morbern™ is one of North America's leading manufacturers and innovators of decorative vinyl upholstery fabrics. For over 50 years, our focus has been on delivering total design and performance solutions in vinyl upholstery for the Corporate, Healthcare, Hospitality, Marine, and Transportation markets and a wide variety of other markets.



www.Morbern.com